

DAFA Sound

ABS 10

Product

Sound absorber manufactured in special, fire retardant melamine foam with particularly good acoustic properties.

Application

For damping (absorbing) noise in ventilation ducts, noise cabins, sound locks, engine rooms, etc. where particular fire safety requirements apply.

The unique material structure ensures that medium and high frequency noise in particular are absorbed despite the extremely low density. The surface is heat reflective, easy-to-clean and resists water and common chemicals.

The thickness of the absorber can be adapted depending on the area of use and the desired result


Features

- Flexible and easy to assemble/use - possibly with mounting tape
- Extremely light - adds minimal weight to the structure
- Good absorption properties
- Special fire resistance
- UL B2 (2) approved
- No fibres

Assembly / preparatory work


Mount on dry, cleaned surfaces. The use of mounting tape is referred to in the specifications for this. The material can be prepared extremely easily using a knife or punching tool.

Can be supplied with mounting tape, full panels/sheets or customised for fixed dimensions.

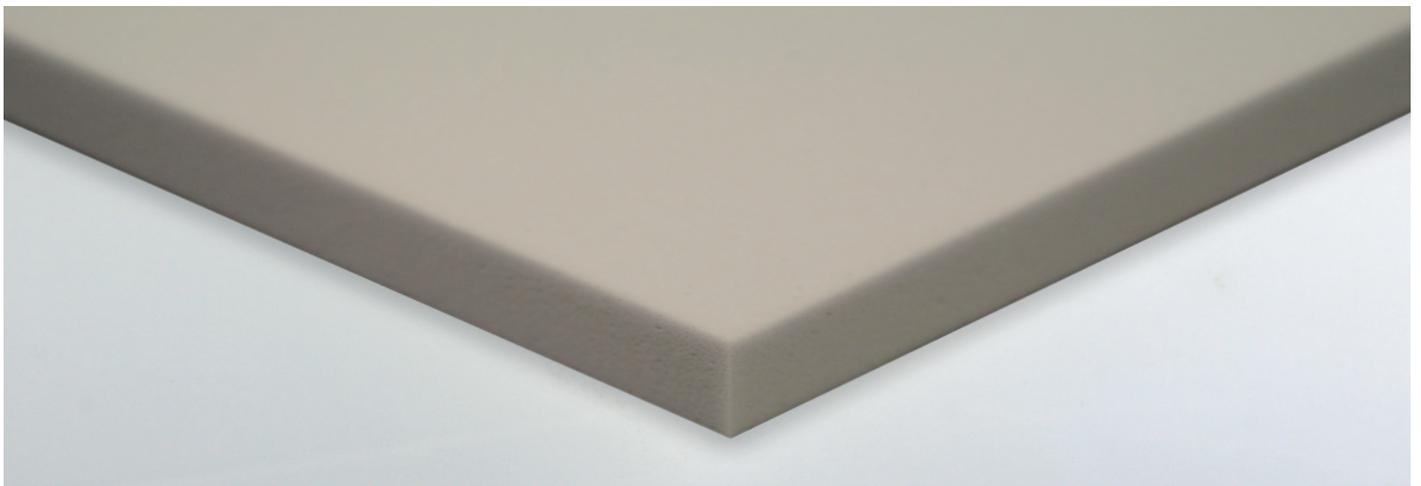

DAFA Sound ABS 10

Sound absorption, α [%] according to EN/ISO 10534-2 for ABS 10

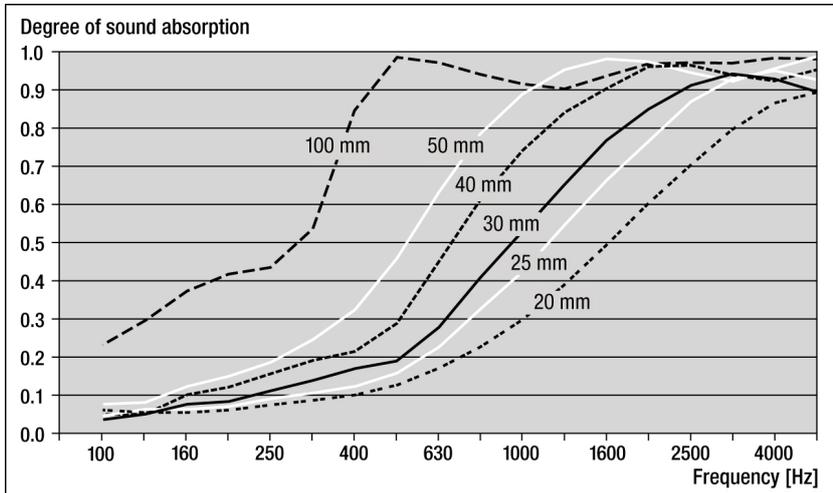

Technical data

Temperature resistance	-60 °C / +150 °C
Short Term	+250 °C
Flammability	DIN4102 B1 / UL94- VO-HF1 / NF P 92-501-M1 / FAR 25.853 (a) /ASTME 662-83
Colour	Foam: Light Grey
Density	10 kg / m ³
Thermal Conductivity	Lamda (10°C) 0.035 W / m°K

